




**B180**

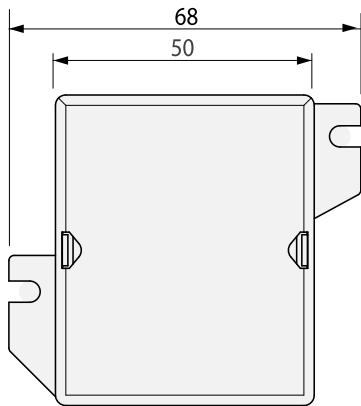


**B 280 - 480**

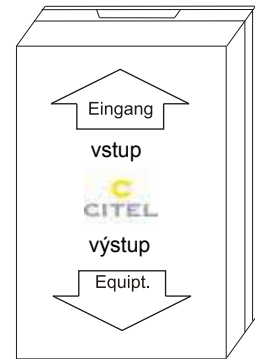

**B180 Zapojení**

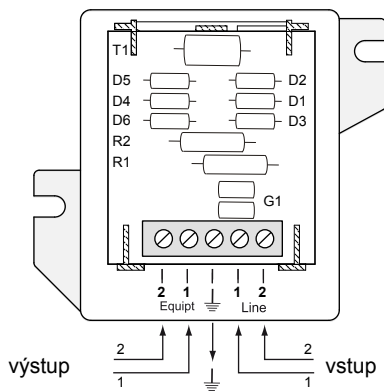

**B 280 - B 480**

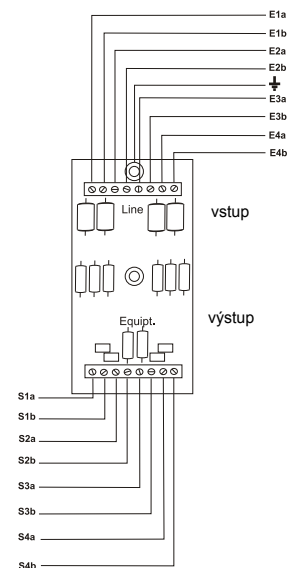

| Typ               | B180        | B 280           | B 380               | B 480           |
|-------------------|-------------|-----------------|---------------------|-----------------|
| I <sub>L</sub>    | 300 mA      | 300 mA          | 300 mA              | 300 mA          |
| U <sub>C DC</sub> | 8 V - 170 V | 6 V - 110 V     | 6 V - 110 V         | 6 V - 110 V     |
| U <sub>AC</sub>   | 6 V - 121 V | 7,1 V - 121,4 V | 7,1 V - 121,4 V     | 7,1 V - 121,4 V |
| R                 |             |                 | 4,7 Ω               |                 |
| C                 |             |                 | 350 pF - 2500 pF    | (DBC < 25 pF)   |
| θ°C               |             |                 | -40° až +80°        |                 |
| max. □            |             |                 | 1,5 mm <sup>2</sup> |                 |
| IP- krytí         |             |                 | 20                  |                 |

Indikace poruchy : není

Kontakt dálkové signalizace stavu : není

**Připojení B180 až B480**

