
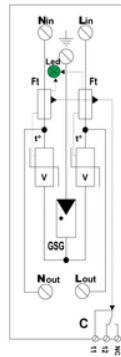


**DACN10-L21YG-275**


- Cost effective single-phase surge protector
- Type 2+3 monobloc compact
- In/Imax: 5 kA/10 kA
- Max. load current: 16A
- Disconnection + AC line cut
- 2-port configuration (series mounting)
- Remote signaling
- EN 61643-11, IEC 61643-11 compliance

Electrical Characteristics	
SPD type	2+3
Network	230 V single-phase
AC system	TN
Max. AC operating voltage	Uc 275 Vac
Max. load current	IL 16 A
Temporary Over Voltage (TOV) Characteristics - 5 sec. Without disconnection	UT 335 Vac withstand
Temporary Over Voltage (TOV) Characteristics - 120 mn Without disconnection or with safety disconnection	UT 440 Vac disconnection
Residual Current Leakage current to Ground	Ipe None
Nominal discharge current 15 x 8/20 µs impulses	In 5 kA
Max. discharge current max. withstand @ 8/20 µs by pole	Imax 10 kA
Withstand on Combination waveform IEC 61643-11 Class III test: 1.2/50µs - 8/20µs	Uoc 10 kV
Protection level L/N @ In (8/20µs)	Up L/N 1.3 kV
Protection level N/PE @ In (8/20µs)	Up N/PE 1.6 kV
Protection level L/PE @ In (8/20µs)	Up L/PE 1.6 kV
Admissible short-circuit current	Isccr 10 000 A
Mechanical Characteristics	
SPD configuration	Single phase
Connection to Network	By screw terminals: 1.5-10mm <sup>2</sup>
Mounting	Symmetrical rail 35 mm (EN 60715)
Housing material	Thermoplastic UL94 V-0
Operating temperature	Tu -40/+85°C
Protection rating	IP20
Failsafe mode	Disconnection and AC line cut-off
Disconnection indicator	Green LED OFF
Remote signaling of disconnection	option DACN10S-L21YG-275
Dimensions	See diagram - 1TE (EN43880)
Weight	0.086 kg
Disconnectors	
Thermal disconnector	Internal
Installation ground fault breaker	Type 'S' or delayed
Fuses	Fuses type gG - 25A
Standards	
Standards compliance	IEC 61643-11 / EN 61643-11 / UL1449 ed.5
Part number	
70115021	

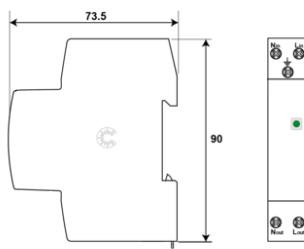

V: High-energy varistor  
 GSG: Specific Gas Tube  
 LED: Disconnection indicator  
 Ft: Thermal fuse  
 t°: Thermal disconnection system

